


Bata-Check 903C

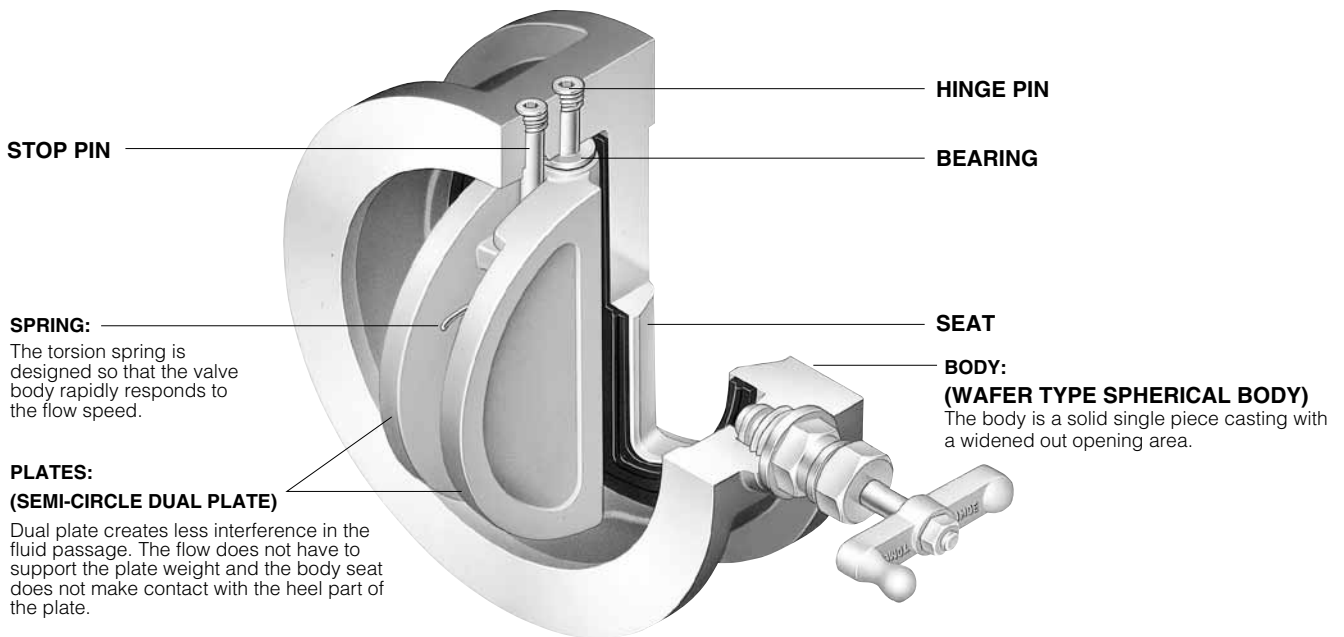

Outstanding Features

1. Lightweight and Compact

Lightweight and compact design that have never been realized in conventional swing check valves.

2. Alleviation from Water Hammer

Instant response by spring-biased dual plates that prevent water hammer.

3. Tight Sealing

Shock-resistance and tight sealing effect ensured by resilient seat.

4. Free Installation Direction


Installed either horizontally or vertically in the piping.

5. Low Head Loss

Opening area is expanded to the allowable limit and head loss of flow passage is less compared to similar dual type check valves.


Comparison Between Wing Check Valve and Bata Check

Swing Check Valve



1. Plate stroke is long.
2. Face to Face dimension is long.
3. Slow response
4. Difficult to install vertically.

Bata Check (wafer check valve)



1. Plate stroke is short
2. Lightweight and compact due to wafer type body.
F. to F. dimension is reduced to about 1/4 and the weight is about 1/5.
3. Maintenance-free due to simple structure.




Standard Specifications

Size	50mm to 300mm
Face to face	TOMOE dimension
Flange accommodation	JIS 10kg/cm ² , ANSI 125 Lbs
Max working pressure	0.98 Mpa
Temperature	Min. -20 degrees C, Max. +80 degrees C (NBR) +120 degrees C (EPDM)
Test pressure	Body hydrostatic test : 1.47 Mpa Seat hydrostatic test : 1.08 Mpa

Spring Selection Criteria


Spring type	Bata check conditions of use 1.0 MPa type.
Low torque spring	Parallel piping in which gas (compressible liquid) or liquid line pressure is between 0.05 and 0.10 MPa or up-flow line in which fluid flows from bottom to top.
Standard torque spring	Parallel piping in which liquid line pressure is between 0.1 and 0.7 MPa or up-flow line in which fluid flows from bottom to top.
High torque spring	Liquid line pressure is 0.7 MPa or higher or down-flow lines in which fluid flows from top to bottom. <i>*Please use a high torque spring in the pump outlet regardless of the pressure.</i>

Head Loss vs. Flow

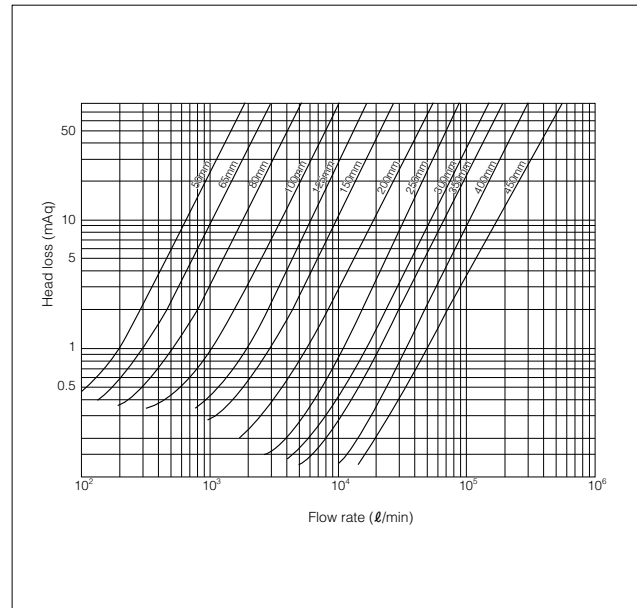

903C Principal Dimensions

Nominal size		Dimension (mm)					Approx. Weight (kg)
mm	inch	ϕd	ϕD	ϕd_1	L	H	
50	2	62	101	42	56	157	2.4
65	2 1/2	73	121	48	56	162	3.4
80	3	89	131	63	60	170	3.9
100	4	115	156	82	66	184	5.5
125	5	142	187	110	70	200	8
150	6	168	217	128	76	213	10
200	8	220	267	174	95	239	17
250	10	273	330	218	108	286	28
300	12	324	375	260	144	309	44

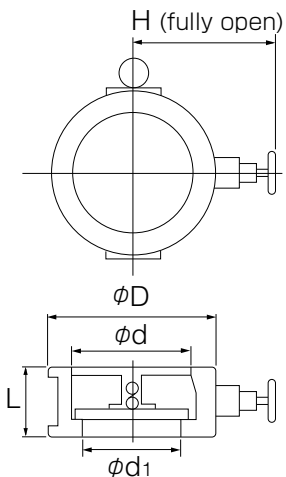

Butterfly Valve
TRITEC
TT2
334A
302A/303Q
304A/304Q
302Y/304Y
304M (HLV)
507V/508V
DTM
846T/847T/847Q
841T/842T
700Z
700G/704G/705G
700GB
731P/732P/732Q/752W
71LG
700E/700K/700S
704G/722F/720F
KRV
227P
907H/908H (MKT)
903C